

**HI-SPEED USB 2.0**  
**eSATA, 2.5"**  
**EXTERNAL**  
**ENCLOSURE**  
**USER MANUAL**  
MODEL 700641



Thank you for purchasing the MANHATTAN® Hi-Speed USB 2.0, eSATA, 2.5" External Enclosure, Model 700641.

Chipset-free, with SATA L-type internal and eSATA L-type external data ports, it quickly transfers data without conversion between SATA-enabled systems. Hi-Speed USB 2.0 connections offer convenient and versatile data storage, transfer and recovery solutions; the aluminum housing provides better heat dissipation for cooler operation and extended life; and the USB-powered design makes it convenient for use almost anywhere without an external supply or adapter. Additional features:

- Supports data transfer rates for Hi-Speed USB 2.0 up to 480 Mbps and SATA up to 3 Gbps
- Windows and Macintosh compatible, Plug and Play, hot swappable
- Lifetime Warranty

Package contents:

- External Enclosure
- Cables: USB A-type male to mini-B male cable, 77 cm (30 in.); eSATA L-type to L-type flat cable, 77 cm (30 in.); USB-to-DC single-post power cable, 77 cm (30 in.)
- User manual and driver CD

System requirements:

- eSATA-enabled PC or Macintosh
- Available eSATA port
- Windows 98/Me/2000/XP/Vista or Mac OS 10.x and above

# HARDWARE INSTALLATION

Follow these steps to prepare the device for installation, then see Step 6 of Software Installation.




1. Open the enclosure.



2. Connect the power and SATA cables to the HDD.




3. Tighten the sides screws to secure the HDD.



4. Slide the connected hard disk drive inside the external enclosure.



5. Replace and tighten the two retaining screws to secure the rear panel.




6. Connect the external cables.



# SOFTWARE INSTALLATION

## Windows 98SE Driver Installation (USB port only)

1. Insert the installation CD in the CD-ROM.
2. Double-click the Setup icon.

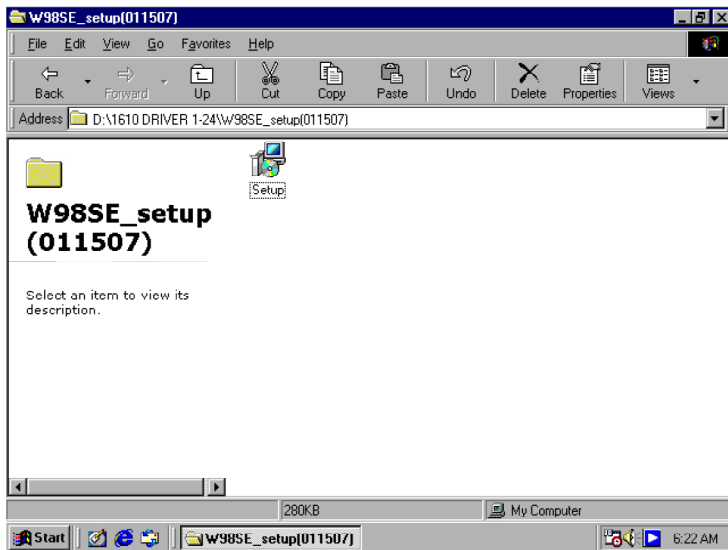


3. When the Welcome screen appears, click "Next."
4. When the "Ready to install" screen appears, click "Install."

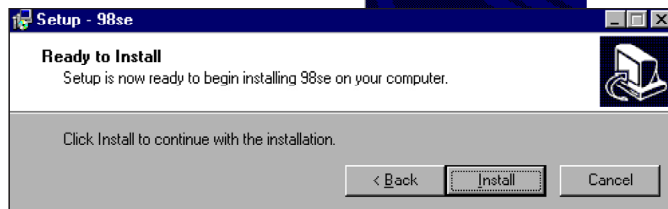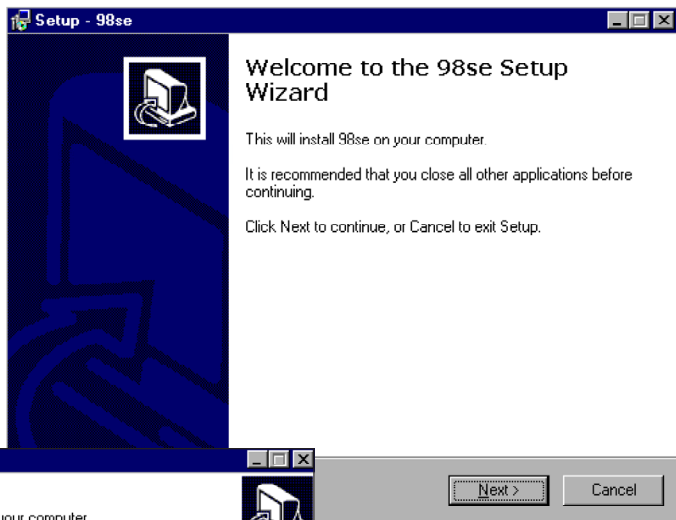


5. When prompted, select "Yes, restart the computer now"; then click "Finish."
6. Connect the External Enclosure with the hard disk drive to the USB port of the computer.

**IMPORTANT:** For proper power connections, plug the cable(s) into your computer first, then into the drive enclosure.

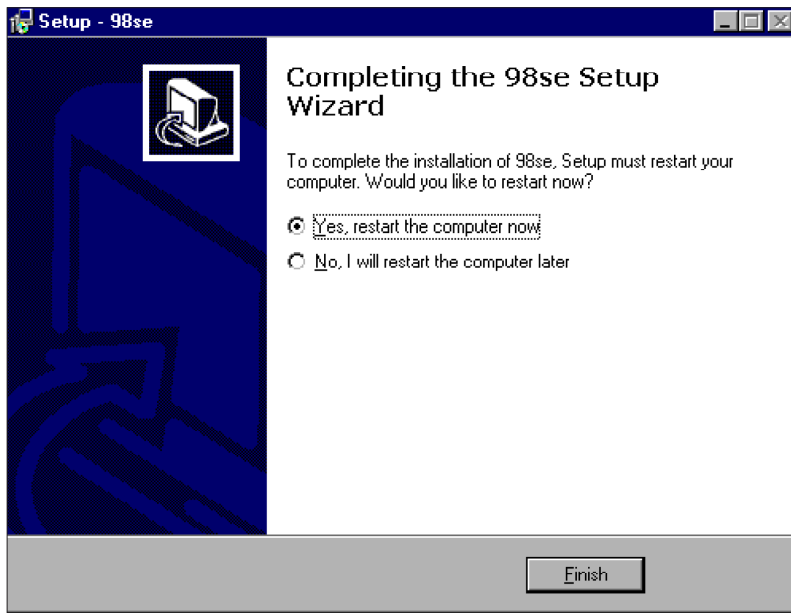


7. A new Removable Disk icon will appear in the My Computer window for formatting the hard disk drive.

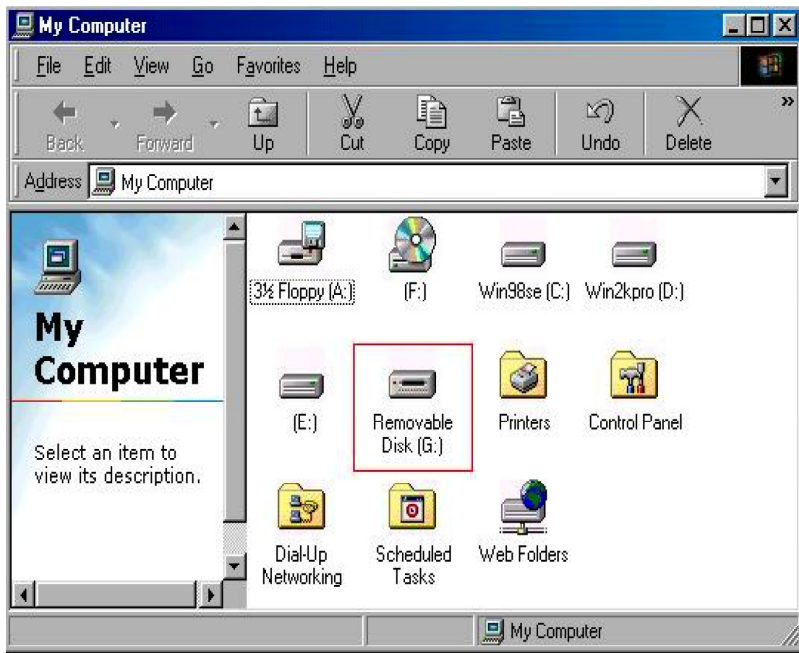


## Windows 2000/XP Installation


1. Click on the My Computer icon, then click "Manage" to initialize the hard disk drive.

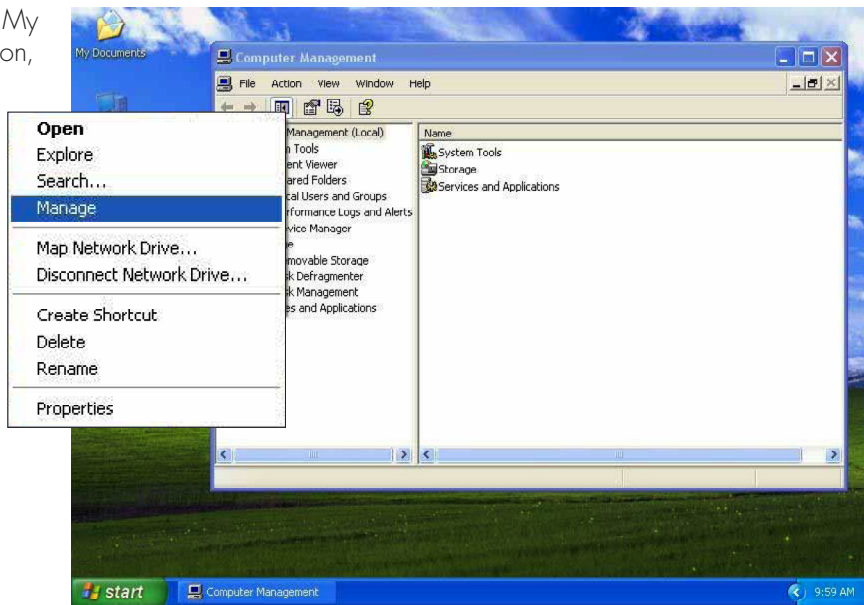

2. Click "Disk Management," then click "Removable Disk," then click "Format."

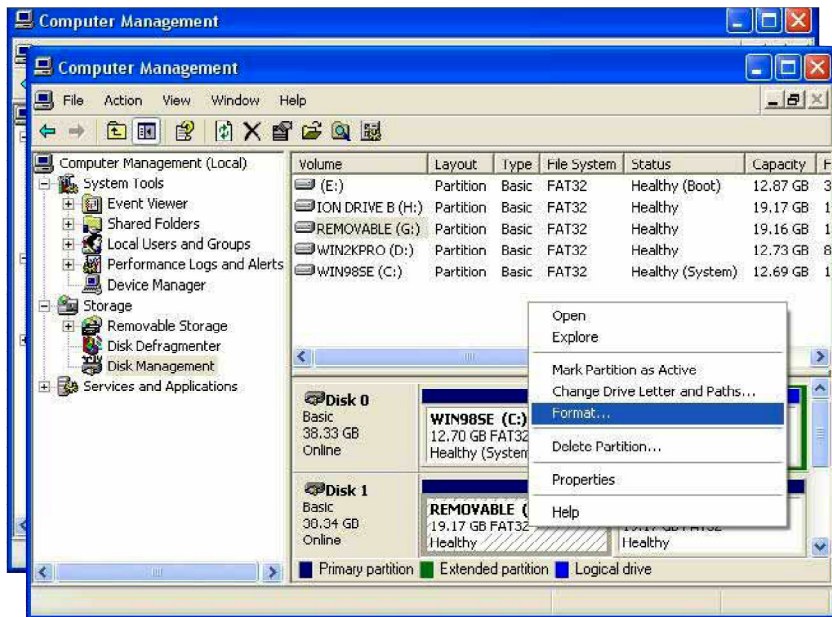


3. Confirm that "Removable" and "FAT32" are entered/selected in the "Volume label" and "File system" fields, respectively. Click "OK."

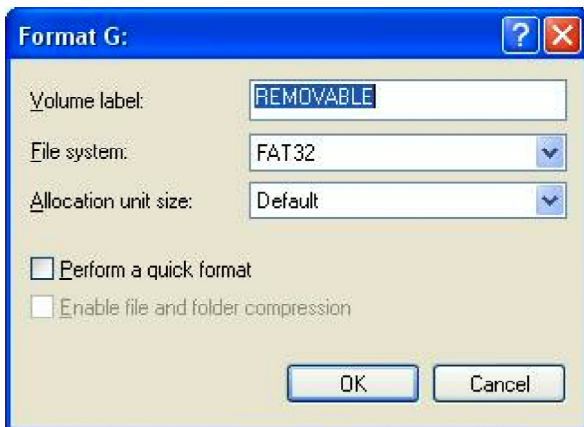

4. When the warning prompt appears, click "OK."



5. Click "My Computer" and confirm that the new "Removable" icon appears. The External Enclosure with hard disk drive is now ready for use.

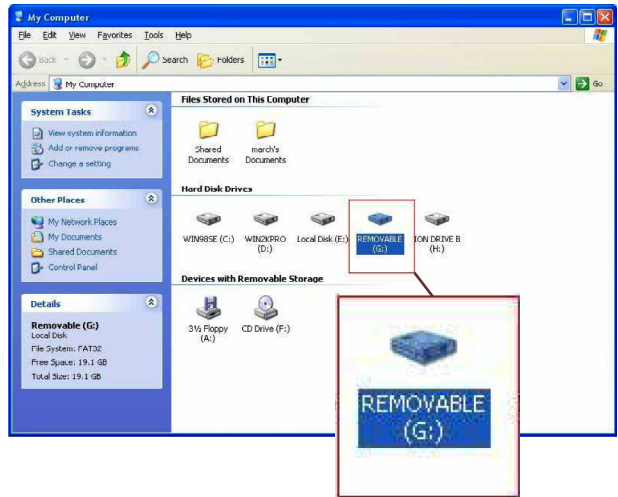

## SPECIFICATIONS

- SATA L-type internal data and power connections
- Hi-Speed USB 2.0 mini-B and eSATA L-type external connections
- Initio Inc1610L chipset
- DC single-post power input
- 13.5 x 8 x 1.5 cm (5.25 x 3.25 x 0.5 in.); 108 g (3.8 oz.)



MANHATTAN® offers a complete line of PC Components, Peripherals, Cables and Accessories. Ask your local computer dealer for more information or visit us online at

**[www.manhattan-products.com](http://www.manhattan-products.com)**

Copyright © MANHATTAN

All products mentioned are trademarks or registered trademarks of their respective owners.